

TECHNICAL DATA SHEET

Revision date: 15.04.2020


ELASTIFIER

Article number: 13601

Intended use: Car refinishing product/ Paint additive

General characteristics: This additive is used to improve the elasticity of acrylic 2K paints and 2K clear coats. CHAMÄLEON ELASTIFIER is required to prevent the 2K coating from cracking when plastic car parts are deformed.

Ideal for almost all plastic car body parts such as:

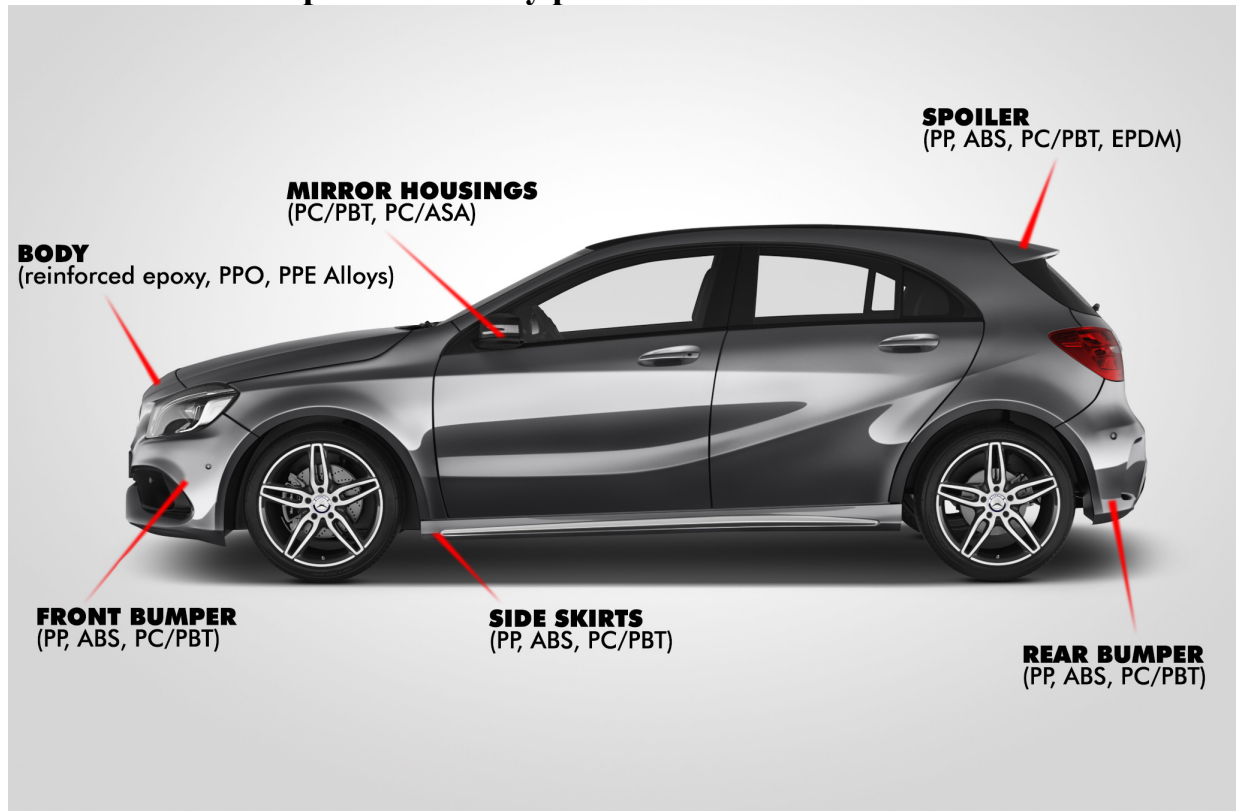

Quantity to add:

10 – 50% (depending to the desired elasticity) Elastifier to the ready to use 2K paint or 2K clear coat



CHAM'ALEON GMBH / RUDOLF-DIESEL-STRASSE 8A / 69115 HEIDELBERG / GERMANY

CHAM'ALEON GMBH
RUDOLF-DIESEL-STRASSE 8A
69115 HEIDELBERG
GERMANY

FON 0049 (0) 6221 - 520 440
FAX 0049 (0) 6221 - 520 449
MAIL INFO@CHAMAELEON-PRODUKTION.DE
WEB WWW.CHAMAELEON-PRODUKTION.DE

Color: colourless

Processing conditions:

Please only use in an adequately ventilated environment with an ample supply of fresh air. Processing temperature should be at least + 10 C° and max. air humidity should not exceed 80%.

Processing tips:

Please note that the Elastifier does NOT change the mixing ratio of the 2K paint or 2K clear coat and hardener.

Depending on the added quantity of Elastifier, the drying time could exceed 100% of normal.

This release replaces all eventually earlier issued versions.

For additional information, not contained in this Technical Data Sheet, please contact the supplier via:
info@chamaeleon-produktion.de

For safety information, please refer to the corresponding Safety Data Sheet.